





AGM SCRUBBER SWEEPER BATTERY

EV6390(6V390AH)

Physical Specification

| | |
|------------------------|------------------------|
| Nominal Voltage | 6V |
| Nominal Capacity(20HR) | 390Ah |
| Nominal Capacity(5HR) | 331Ah |
| Length | 295±2mm(11.61inches) |
| Width | 180±2mm(7.09inches) |
| Container Height | 406±2mm(15.98inches) |
| Total Height | 428±2mm(16.85inches) |
| Wet Weight | Approx52.8Kg(116.4lbs) |
| Standard Terminal | AM |
| Container Material | PP |




Charge Method Constant voltage charging at 20°C (68°F)

| Type | Standby use | Cyclic use |
|--------------------------|-----------------------|-----------------------|
| Max.Charge Current | 0.25C ₁₀ A | 0.25C ₁₀ A |
| Charge Voltage | 6.8~6.9V | 7.2~7.35V |
| Temperature Compensation | -10mV/°C | -15mV/°C |

Electrical Specification(20°C , 68°F)

| | | |
|------------------|---------------------|--------|
| Rated Capacity | 20 hour rate(19.5A) | 390Ah |
| | 5 hour rate(66.2A) | 331Ah |
| Reserve Capacity | 25Amps | 915min |
| | 75Amps | 255min |

Discharge Characteristics(20°C , 68°F)

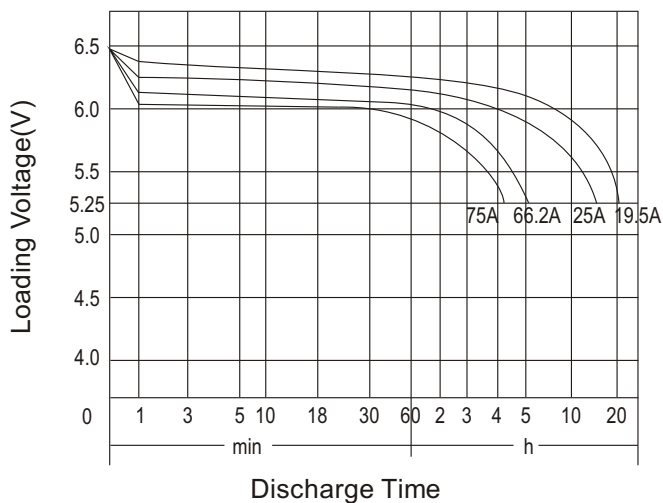

Cycle life in relation to depth of discharge

